

Hydrocyclone Filters

3"





Technical Specification

- Available Connections: BSP/NPT male threaded, Flange, Victaulic
- Maximum Operating Pressure: 6 kg/cm²

Specifications	AQ-146M	
	US Standard	Metric Standard
Inlet/outlet connection	3" NPT male thread	3" BSP male thread
Max. Operating Pressure	85Psi	6 kg/cm ²
Range of Flow Rate	155-220 GPM	35 -50 m ³ /h
Nominal Flow Rate	220 GPM	50 m ³ /h
Material of Construction	PPGF + PAGF	PPGF + PAGF
Clamp	Stainless Steel SS-316	Stainless Steel SS-316

Dimensions		
Model No.	146M	
Inlet / Outlet	3"/80mm	
A	990	990
B	868	868
C	248	248
D	175	175
E	395	482
Collector Capacity, Ltr	8	10
Gross Weight, kg	9.4	9.6

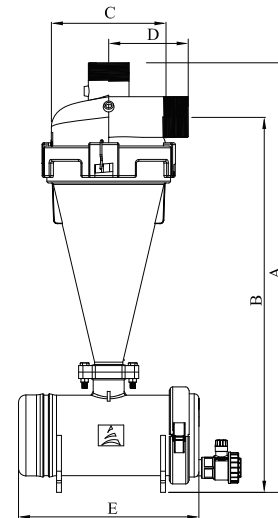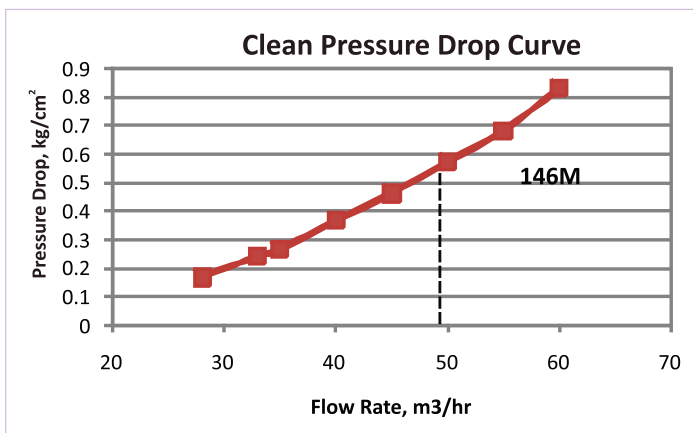

E-mail: contactus@automatworld.com
 Website: www.automatworld.com

Creating a Green World